


Physical & Thermal Test Results

Armorcoat 10 Mil Silver 80



Armorcoat works around the clock to protect occupants and property. To increase shatter-resistance, thicker optical grade polyester is used with special laminating adhesives, giving Armorcoat its exceptional strength.

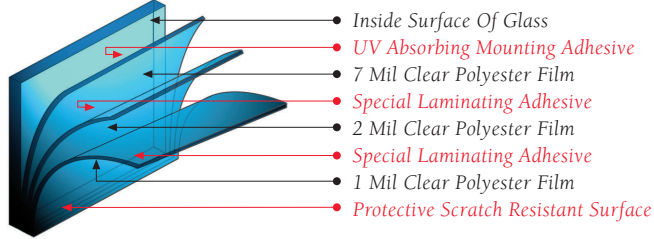

Test Name	Film Thickness				
	4 Mil (100 micron)	7 Mil (175 micron)	8 Mil (200 micron)	10 Mil (250 micron)	14 Mil (350 micron)
Tensile Strength ASTM D 882 (lbs/in ²)	29,000	29,000	29,000	29,000	29,000
Elongation (%) ASTM D 882	>100	>100	>100	>100	>100
Yield Stress (5%) ASTM D 882 (lbs/in ²)	15,000	15,000	15,000	15,000	15,000
Break Strength (lbs/inch)	116	203	232	290	406
Yield Strength (5%) (lbs/inch)	60	105	120	150	210
Tear Strength Graves Tear Test, ASTM D 1004 (lbs force)	6.5	18.9	21.6	27.0	37.8
Tensile Modulus ASTM D 882 (lbs/in ²)	550,000	550,000	550,000	550,000	550,000
Puncture Strength ASTM D 4830 (lbs)	66	115	140	175	230
Peel Strength (g/inch of width)	>2,500	>2,500	>2,500	>2,500	>2,500
Poisson's Ratio ASTM D 882	.38	.38	.38	.38	.38
Abrasion Resistance (%) ASTM D 1003-92, ASTM D 1044 8 100 Cycles	<5	<5	<5	<5	<5
ANSI Z 97.1	Pass	Pass	Pass	Pass	Pass
CPSC CFR 1201, Category II	No	Pass	Pass	Pass	Pass
GSA Security Criteria Performance Condition, Daylight Application ¹ Performance Condition, Wet Glaze ¹ Performance Condition, Mechanical ² <i>1=4PSI/28PSI/ms, 2=10PSI/69PSI/ms 3b</i>	3b NA NA	3b NA NA	3b 3a 3a	3b NA NA	3b NA 3a
Smoke Development Index ASTM E 84	28	28	28	28	142
Flash Temperature (°F) ASTM D 1929	730	730	730	730	730
Self Ignition (°F) ASTM D 1929	750	750	750	750	750
Flame Spread Index ASTME 84	2	2	2	2	5

Notes: This test data contains results arrived at only after employing specific test procedures and standards. The included data does not constitute a recommendation for, endorsement of, or certification of the product or material tested. This data is provided for informational purposes only and are not to be considered part of the basis of any bargain or transaction involving Bekaert Specialty Films, LLC (BSF) products. BSF makes no representation or warranty, expressed or implied, including the implied warranties of merchantability or fitness for a particular purpose, that its products will conform to these test data. Extrapolation of data from the sample or samples relating to the batch or lot from which data were obtained may not correlate and should be interpreted accordingly with caution. BSF shall not be responsible for variations in quality, composition, appearance, performance, or other feature of similar subject matter produced by persons or under conditions over which BSF has no control.

